

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of

MURPHY

Serial No. 09/694,673

Filed: October 24, 2000



Atty. Ref.: 922-115

TC/A.U.: 2665

Examiner: J. Mattis

For: IDENTIFYING AND EDGE SWITCH AND PORT TO  
WHICH A NETWORK USER IS ATTACHED

\* \* \* \* \*

June 15, 2004

**RECEIVED**

JUN 21 2004

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Technology Center 2600

Sir:

**SUBMISSION OF PRIORITY DOCUMENTS**

It is respectfully requested that this application be given the benefit of the foreign filing date under the provisions of 35 U.S.C. §119 of the following, a certified copy of which is submitted herewith:

Application No.

Country of Origin

Filed

0017316.1

Great Britain

15 July 2000

Respectfully submitted,

**NIXON & VANDERHYE P.C.**

By:

Larry S. Nixon  
Reg. No. 25,640

LSN:vc

1100 North Glebe Road, 8th Floor  
Arlington, VA 22201-4714  
Telephone: (703) 816-4000  
Facsimile: (703) 816-4100



**THIS PAGE BLANK (USPTO)**



The  
Patent  
Office

6552  
09/694,673



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


Dated 31<sup>st</sup> October, 2000.

**THIS PAGE BLANK (USPTO)**

14 July 2000  
Page 1

Patents Form No. 1/77

The Comptroller  
The Patent Office  
Cardiff Road  
Newport  
Gwent NP10 8QQ

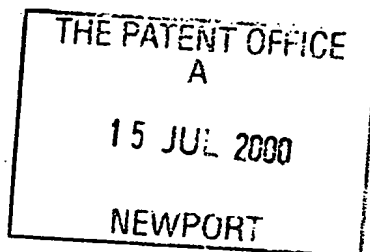

**REQUEST FOR THE GRANT OF A PATENT**

**0017316.1**

The grant of a patent is requested by the undersigned on the basis of the present application:

1. Title of the invention: IDENTIFYING AN EDGE SWITCH AND PORT TO WHICH  
A NETWORK USER IS ATTACHED

2. Applicants details:

First or only applicant: 3Com Corporation

Country: USA State: Delaware

Address: 5400 Bayfront Plaza  
Santa Clara  
California 95052-8145  
United States of America

754628 6002

3. Name of agent: BOWLES HORTON ADP Code: 8805003

Agent's address: Felden House, Dower Mews  
High Street, Berkhamsted  
Hertfordshire HP4 2BL

4. Agent's reference: 105199

5. The application claims an earlier date under any of Sections 8(3), 12(6), 15(4) or 37(4): NO

6. Declaration of Priority (if any)


Country	Application Number	Priority date
NONE		

**THIS PAGE BLANK (USPTO)**



Patents Form No. 7/77

The Comptroller  
The Patent Office  
Cardiff Road  
Newport  
Gwent NO10 8QQ

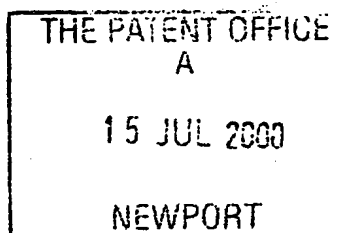

**STATEMENT OF INVENTORSHIP AND OF RIGHT TO THE GRANT OF A PATENT**

Patent application No.(new) **0017316.1**

Title: **IDENTIFYING AN EDGE SWITCH AND PORT TO WHICH A NETWORK USER IS ATTACHED**

I/We: **3Com Corporation**

the applicants in respect of the above-mentioned application for a patent declare as follows:

(i) I/We believe that the person(s) whose name(s) and address(es) are stated on the reverse side of this form is/are the inventor(s) of the invention in respect of which the patent application is made;

(ii) the derivation of my/our right to be granted a patent upon the said application is as follows:

by virtue of the employment of the inventor

(iii) I/We consent to the publication of the details contained herein to each of the inventors named on the reverse side of this form

Signature:  14 July 2000  
for BOWLES HORTON (Authorised Agents)

Telephone: 01442 875961

Our reference: 105199

**THIS PAGE BLANK (USPTO)**

## IDENTIFYING AN EDGE SWITCH AND PORT TO WHICH A NETWORK USER IS ATTACHED

### Field of the Invention

This invention relates to packet-based data communication networks and is particularly concerned with a technique for identifying the particular switch and port thereof to which a network user is directly attached, so as to be able to apply a selected control policy to that user by means of appropriate configuration or control of the port.

### Background to the Invention

In the management of local area networks and other networks which may have a multiplicity of users, it is necessary for a policy server to locate a switch, hereinafter called 'edge switch', to which a user is attached and to apply user based policy rules to that switch

In this specification, 'switch' is intended to refer to a multi-port device which is capable of responding to address data within addressed data packets to direct those packets to a port or ports in accordance with the address data. The invention requires such a switch to be configurable so that packets passing through any particular port may be 'snooped', that is to say examined by appropriate processing circuits associated with that port to divert selected type of packets to a 'management agent' for processing. Such switches are known and are commercially available. One example is the 3Com Super Stack II switch 3300, made by 3Com Corporation of Santa Clara, California.

### Summary of the Invention

The invention is preferably implemented in practice by the sending of a special unicast request packet with a destination corresponding to the user's media access control address and network (internet protocol) address, the request packet containing an identification code,

detecting the code at the switch port to which a user is connected, diverting the packet to a management agent within the switch or to means having access to the switch, and returning to a remote server an identification of the switch and the user.

5 Further features and developments of the invention will be apparent from the following detailed description.

#### Brief Description of the Drawings

10 Figure 1 is a schematic illustration of part of a packet based network in which the present invention may be employed.

Figure 2 is a diagram summarising the sequence of requests and replies characteristic of the present invention.

15 Figure 3 illustrates an Ethernet packet which may be employed in the invention.

Figure 4 illustrates a header portion of the packet illustrated in Figure 3.

20 Figure 5 is an explanatory diagram.

#### Description of a Preferred Example

25 Figure 1 illustrates part of a packet based network which includes a network core 10 having a multiplicity of network units (not shown) and including a policy server 11. For the purposes of the present explanation, the policy server 11 will have a route including a Unit 8, and a Unit 7 (for example switches) to a final stack of switches 12 which include six stacked units Units 1 to 6 of which Units 1 to 4 are linked by a 'cascade' connection 13 so that they constitute, and can be managed as, a single logical entity. Port 6 of Unit 3 is connected to port 6 of Unit 6 and port 6 of Unit 4 is connected to port 6 of Unit 5. In addition to any other

30

connections (not shown) that may exist between the units and from the units to external users, a user such as PC1 is connected to port 4 of Unit 1, user PC2 is connected to port 5 of Unit 6 and user PC3 is connected to port 1 of Unit 6. It may be presumed that, in accordance with known practice, a packet directed to the network or internet protocol address of any of the users PC1, PC2 and PC3 will reach those users by way of the above mentioned ports to which they are connected, by the ordinary process of an address resolution protocol followed by the customary packet based switching performed by the switch units on the route between policy server 11 and the particular user. Further, it is presumed that in accordance with known practice the switches are remotely configurable and in particular are so controllable to impose restrictions (policy rules) on a user connected to a particular port of a switch. These restrictions, enforced by an examination of for example header data of packets sent or received by way of that port, may determine (for example) which resources the user is allowed (or not allowed) to access, which times of the day the user may access the network, whether the user should have access to the Web, which 'quality of service' (such as priority) is applied to the user and so on. Such policy rules are specific to a user and need to be applied irrespective of the location of the user in the network.

It is convenient to apply these rules by means of a 'central' or policy server which has recourse to a database to specify the policy rules for each user. To enable the policy server to apply the rules the server must download the relevant policy information to the 'edge' switch to which the user is connected and for that purpose the switch and port which are the edge switch and port respectively for that user need to be identified.

In the present example, Port 4 of Unit 1 is an edge port for PC1, in that it is the relevant port of the switch which is closest to the user. This does not preclude the interpolation of a non-selective device (such as a repeater) between the edge port and the user.

It is assumed in the following that a policy is to be applied to the user PC1. For this purpose it is necessary for the policy server 11 to discover the identity of the port (Port 4 of Unit 1) to which PC1 is connected. A preferred method sequence is as follows.

1. A necessary preliminary to the determination of the identity of the edge switch is the obtaining of the network (internet protocol) address of the user's end station (PC1). This may readily be obtained by means of a log-on detector in known manner. If the MAC address of the user is not initially known, then the policy server executes an ARP (address resolution protocol) for it. For this protocol to work, it is necessary (but usual) for there to be a routed connection between the policy server and a VLAN of which the user is currently a member.

2. The policy server constructs a special unicast request packet with a destination corresponding to the user's MAC and IP address. This is preferably in the general form of a 'ping' packet. Such a packet is used in a management protocol (ICMP) and is coded to elicit an immediate reply in a known form. The Ping packet used in this invention has a payload which contains a special 8 byte number. It may also contain policy information, if special security precautions are added to the ping.

The form of this packet is shown in Figure 3. The packet 30 comprises a 'Ethernet' header 31, an IP header 32, an ICMP header 33, a locator Ping ID 34, locator type fields 35, locator 'attributes' fields 36 and a conventional CRC (cyclic redundancy code) field 37.

The Ethernet header and the IP header are in conventional form. The ICMP header is in standard form, shown in Figure 4.

The fields in the ICMP Header are as follows.

The Type field indicates the ICMP message type. This is set to 8 for a 'ping' request, 0 for a 'ping' reply.

The Code field is not used. This is always set to zero.

The Checksum field covers the entire ICMP message, and preferably uses the same algorithm as the checksum in the IP header.

5 The Identifier field is an identifier to aid matching of requests and replies. This field is present in all locator ping packets.

The Sequence Number field is a sequence number to aid matching of requests and replies. This field is present in all locator ping packets.

10 The locator Ping ID is a fixed, eight octet, pattern which is used to identify the ping as a locator ping packet. The value of this field is 0x85-92-0A-7C-D1-40-3B-F2.

15 There is a finite possibility that this pattern could occur in the payload of a normal ping packet. However, if it does, then the sender of the ping request would receive a ping reply with some additional information in the payload. It is not expected that this would cause any problem, in the extremely rare cases where it would occur.

20 The Locator Type is a single octet field which is used to indicate the type of locator ping packet. It has a value of 0x00 for locator pin request packets, and 0x01 for locator ping reply packets.

25 The remainder of the payload of the locator ping requests and locator ping replies consists of a series of attributes. The use of attributes allows the protocol to be extensible. If one end of the conversation does not recognise a particular attribute, it just ignores it. These attributes are of the type-length-value format, as shown in Figure 5, and will be discussed later.

3. The special ping packet is forwarded using layer 2 and layer 3 forwarding and routing, towards the edge of the network, where the user is connected. Referring to Figure 1 above, assume that the special packet has now arrived at Unit 7. Because Unit 7 is not an edge

switch, it does not have ICMP snooping enabled. Therefore it just forwards the special packet on as a normal packet, to Unit 1.

4. Because Unit 1, Port 6, is not an edge port, ICMP snooping is not enabled, so the request packet is forwarded to Port 4.

5. PC1 echoes back a ping reply (keeping the ping payload unchanged – in accordance with ICMP practice.

6. Because Unit 1, Port 4, is an edge port, it has ICMP snooping enabled. Therefore, the special ping reply is diverted to the management agent in Unit 1.

7. The management agent parses the packet's payload to see if it is an unmodified special ping. In this case, the agent then further parses the packet to extract other payload information, which may contain policy information.

8. The edge switch modifies the payload of the special ping. For example, it could: change the "modifier flag" from 00 to FF; add the IP address of the switch or the stack; add the MAC address of the user; add the port number of the switch (or stack), to which the user is connected; and add the port VLAN.

9. The same ping packet that is used to locate the edge switch, may also be used to deliver policy information to it. If policy information is included in the special ping, then it is extracted and enforced by the edge switch at this stage.

10. The edge switch then lets the locator ping continue back to the initiator (policy server).

11. The policy server knows the identity of the edge switch and port number corresponding to the user. If it hasn't used the special ping mechanism to deliver policy, it can now do this via some other mechanism, such as SNMP.



The full sequence of events is summarised in Figure 2 above.

As described above, any packet type capable of being snooped on by the edge switch hardware, may be used for the scheme. For packet types other than ping, the edge switch would have to snoop on these before letting them go through the the end-station.

This is a general solution, and may be used at any time by the policy server to locate the edge switch (e.g. not just at user login). The only condition is that the policy server knows the IP address of the user. Therefore, there is no need for the policy server to maintain a big table cross-referencing every logged in user to an edge switch. With this solution, the policy server just gets the appropriate information for a user on demand.

The various attributes are listed in Table I below.

Type	Name	Present in Locator Ping Requests	Present in Locator Ping Replies	Compulsory
1	Edge-Switch-IP-Address	N	Y	Y
2	Slot-And-Port	N	Y	Y
3	IF-Index	N	Y	Y
4	Bridge-Port-Number	N	Y	Y
5	User-MAC-Address	N	Y	Y
6	User-VLAN	N	Y	N
7	User-Policy-Info	N	Y	N
8	Edge-Switch-NL-Version	N	Y	Y
9	Username	Y	Y	N

The Length field is one octet, and indicates the length of the attribute, including the Type, Length and Value fields. If an attribute with an invalid length is received, it should be ignored.

- 5 The Value field is zero or more octets and contains the information specific to a locator attribute. The format and length of the Value field is determined by the Type and Length fields.

The format of the value field is one of three data types:

- 10 String: 0-253 octets. A "string" in the Value field doesn't require an ASCII, NUL, because the attribute already has a length field.

Address: 32 bit value, most significant octet first.

15

Integer: 32 bit value, most significant octet first.

Each of the locator attributes are now described in more detail.

20 Type 1: Edge Switch-IP-Address

- This attribute indicates the identifying IP address of the edge switch connected to the user to which the corresponding locator ping request was destined. This attribute is only present in locator ping replies, where it is compulsory. It has a length of 6 octets and the value contains the IP address, which is 4 octets.
- 25

Type 2: Slot-And-Port

- This attribute indicates the port number on the edge switch connected to the user to which the corresponding locator ping request was destined. It is presented in "slot-and-port" format.
- 30

This attribute is only present in locator ping replies, where it is compulsory. The length is 4 octets and the value contains the port number, which is 2 octets.

#### Type 3: IF-Index

This attribute indicates the port number on the edge switch connected to the user to which the corresponding locator ping request was destined. It is present in "ifIndex" format. This attribute is only present in locator ping replies, where it is compulsory. The length is 4 octets and the value contains the port number, which is 2 octets.

#### Type 4: Bridge-Port-Number

This attribute indicates the port number on the edge switch connected to the user to which the corresponding locator ping request was destined. It is presented in "bridgePortNumber" format. This attribute is only present in locator ping replies, where it is compulsory.

---

The Length is 4 octets and the value contains the port number which is 2 octets.

#### Type 5: User-MAC-Address

This attribute indicates the MAC address of the user's end-station. The Length is 8 octets and the value contains the MAC address, which is 6 octets.

#### Type 6: User-VLAN

This attribute indicates the static VLAN in which the user's edge port is disposed. The Length is 4 octets and the value contains the global VLAN ID, which is 12 bits.

#### Type 7: User-Policy-Info

This attribute is an octet string which contains the value of the User-Policy-Info MIB object for the user's edge port. The length is variable. The value field contains the value of the user-Policy-Info MIB object.

#### 5      Type 8: Edge-Switch-NL-Version

This attribute indicates the version of Network Login supported by the edge switch to which the user is connected. The length is 3 octets and the field contains the value 0x000 for IEEE 802.1X.

#### 10     Type 9: Username

This attribute may be used by the policy server, to send the username information to the edge switch, to which the user is connected. If present in the locator ping request, this ping then  
15      remains in the subsequent locator ping reply. The length is variable and the value is an octet string containing the username.

#### Edge Switch Agent Requirements

20      Because the locator ping goes all the way to the end-station, and then comes back into the edge switch, there is no need to worry about situations where the MAC address of the end-station may have aged out, or where the end-station has moved. As long as the end-station is connected somewhere in the network, one, and only one, reply is obtained to a locator ping.

#### 25     Use-Cases for Switch Agent

This section describes the behaviour of the software agent in a switch, in order to support the locator ping protocol.

### Reception of Locator Ping Request on Edge Port

This use-case represents the reception of a locator ping request packet from an initiator. Because it is an edge port, the hardware is configured to snoop on ICMP packets. It therefore  
5 diverts the locator ping to the software agent.

In this case, the agent must: parse the packet, to ensure that it is locator ping request; and modify and send locator ping reply back to initiator, indicating IP address of edge switch (or stack, if the edge switch does not have one), and user port number. The IP header remains  
10 untouched. This is because the edge switch may not have an IP address of its own.

There needs to be some mechanism to examine the rate of reception of pings, to guard against a ping storm from a hostile user. This is because the management port could get overrun. If a ping storm is detected, the agent should disable ICMP snooping for some interval, e.g. 30  
15 seconds. Because ICMP snooping is only being done of the edge ports, and not up-link ports, the chances of the switch being subjected to a ping storm are reduced.

### Reception of Ping other than Locator Ping Request on Edge Port

20 As the port is an edge port, ICMP snooping is enabled. Therefore, the packet gets diverted to the processor. However, the processor should just forward the packet as normal.

### Reception of Any Ping on Non-Edge Port

25 As the port is a non-edge port, ICMP snooping is disabled. Therefore, all packets are forwarded by the hardware, as normal.

### Locator Ping Initiator Requirements

Locator ping requests are always transmitted by the initiator (e.g. policy server), and received by the edge switch, via the end-station echo. They are then modified, and forwarded by the edge switch, to be received by the initiator. The edge switch never initiates the conversation.

For the purpose of reliability of the transfer of information, the initiator server needs to keep track of locator ping requests and replies. This can be done using the sequence numbers in the ICMP header. If no reply has been received corresponding to a particular request for a specified period of time, then the initiator should re-send the original packet. The default value for timeout is thirty seconds. The maximum number of retries is three. If, after the maximum number of retries, the initiator has not received a locator ping reply, it should make a record of this.

CLAIMS

1. A method of identifying an edge switch of a packet - based communication network, said edge switch having a port to which a specified user is connected, the method comprising the steps of:

(a) sending a unicast request packet from a policy server to the specified user, the unicast request packet including destination address data and a selected identification code;

(b) detecting said selected identification code at said port;

(c) diverting the packet to a management agent for the switch; and

(d) returning to the server an identification of the switch and said user

2. A method according to claim 1 wherein said specified user replies to said unicast request packet by means of a reply packet including said identification code and said edge switch detects the identification code in said reply packet.

ABSTRACT

5 A method of identifying an edge switch of a packet - based communication network, the edge  
switch having a port to which a specified user is connected comprises (a) sending a unicast  
request packet from a policy server to the specified user, the unicast request packet including  
destination address data and a selected identification code; (b) detecting the selected  
10 identification code at said port; (c) diverting the packet to a management agent for the switch;  
and (d) returning to the server an identification of the switch and the user



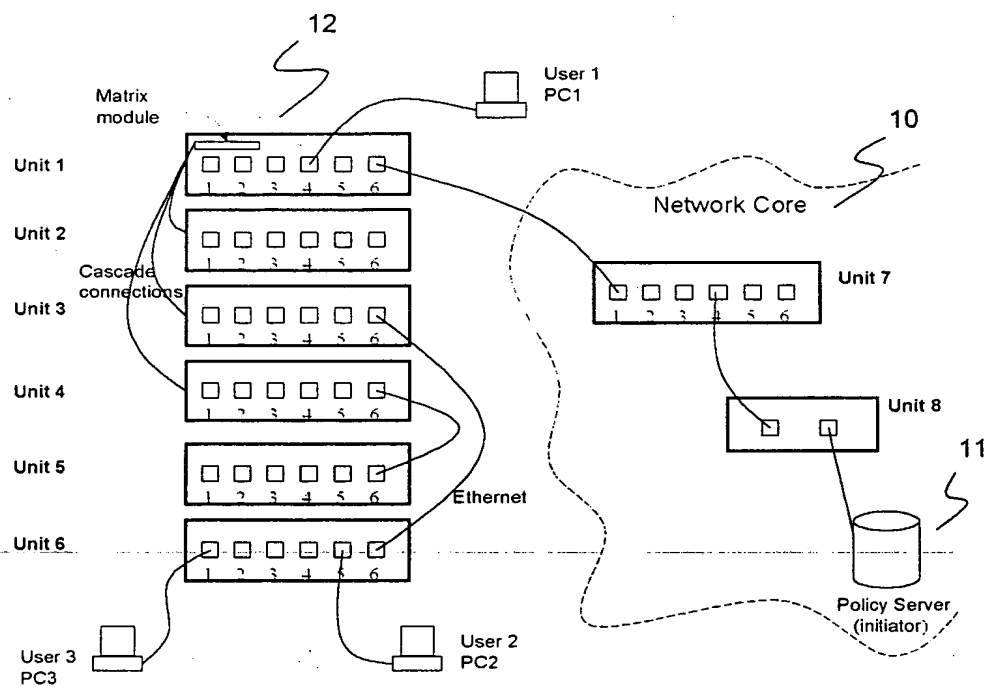


FIG.1

**THIS PAGE BLANK (USPTO)**

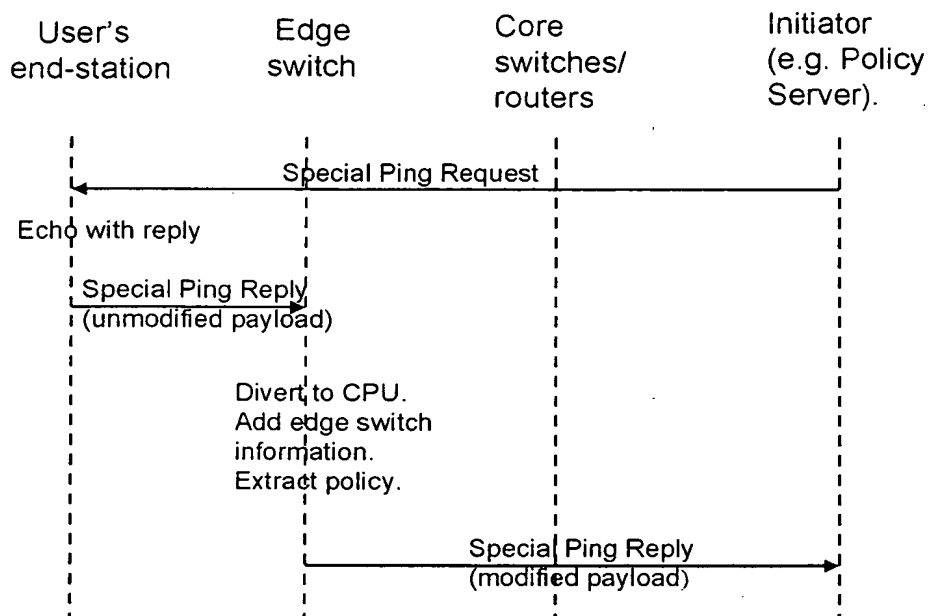


FIG.2

**THIS PAGE BLANK (USPTO)**

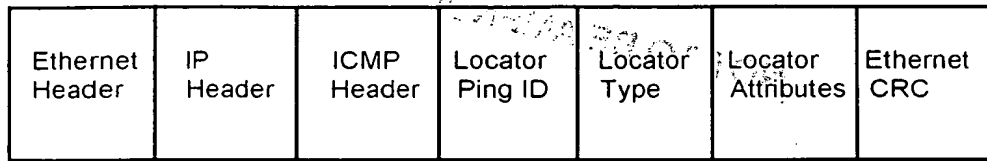


FIG.3

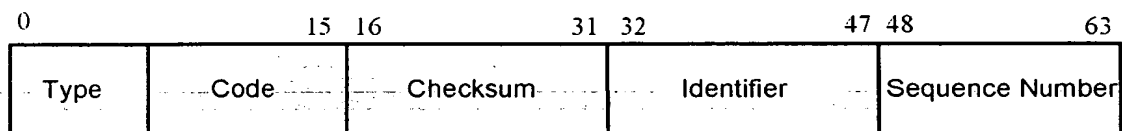


FIG.4

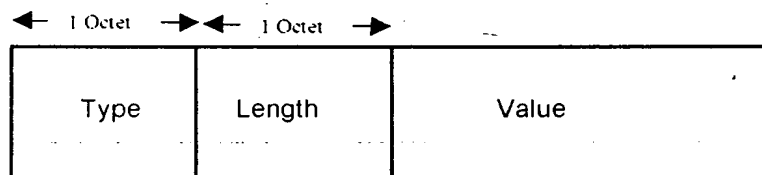


FIG.5

**THIS PAGE BLANK (USPTO)**